



TOWN OF WEST SENECA

BRIAN J. ADAMS
SUPERINTENDENT OF
HIGHWAY DEPARTMENT

TO: Honorable Town Board
FROM: Brian Adams
DATE: April 18, 2022
RE: Emergency Purchase of Dump/Plow Trucks

Dear Honorable Town Board,

Please authorize the Highway Superintendent to secure six (6) dump trucks under an emergency purchase. These trucks will help replace the eight dump trucks lost in the highway fire on the morning of December 25th, 2021. Our trucks are used all year long for many different jobs, including snow plowing, snow removal, salting, brush removal and hauling stone and blacktop for road reconstruction. Although we are extremely grateful for the help and support of surrounding municipalities this past winter, it's imperative that the highway department replace our equipment needed to provide services to our residents.

Please see the attached list of purchases below.

Sincerely,

Brian Adams

Superintendent of Highways



39 SOUTH AVENUE • WEST SENECA, NEW YORK 14224 • (716) 674-4850

www.westseneca.net

badams@twsny.org

TENCO Industries

5700 South Lima Road Lakeville, NY 14480

Phone: 888-808-3626 / Fax: 585-346-2982

Quote Valid For 30 Days

February 17, 2022

Town of West Seneca, NY

Tenco Turn-Key Unit 2022/Cyncon Equipment

Tenco Industries is pleased to offer you the following information at your request:

Chassis:

One (1) 2023 Navistar Model HV507 SFA Single Axle Truck

Cab Color Winter White
370 HP Cummins L9 Diesel Engine
Allison 3000 RDS Automatic Transmission
20,000# Front Axle
30,000# Rear axle
70 Gallon Aluminum Fuel Tank
7 Gallon DEF Tank
Air Ride Cab and Drivers Seat
Power Windows, Power Door Locks
Heated Windshield
Air Conditioner w/integral Heater and Defroster
Aluminum Wheels Front and Rear

Equipment:

One (1) Tenco Model H345-FW

Custom tilting front hitch with Heated LED plow lights and hitch portion of Tenco-Loc System

One (1) Tenco Model FFH48-R

48" full hydraulic front post

One (1) Tenco Model FRH48-R

48" full hydraulic rear tower, armature, push arms, and floating wing adapter

One (1) Tenco Model TCP-11-S-42-FKC

Reversible full trip plow with 42" tall steel moldboard, 132" cutting edge, rubber snow deflector, plow markers, cable sheeve lift and plow portion of Tenco-Loc System

One (1) Tenco Model TCW-11H-39-N-R

Right side wing with 132" cutting edge, 3/16" wing skin, 32" intake height, 39 1/2" discharge height, and LED wing light

One (1) Tenco Model P48R

4-8-30 trip hinge with aeon rubber compression spring

One (1) Tenco Model TCB-10-T-CL-C-CL-LF USA

10 ft. 12M combination dump body and material spreader with single acting telescopic hoist, side tilt, 1/4" thick Hardox 450 floor/tailgate, 3/16" Hardox 450 sides/front with clean side construction, Hardox 450 rated at min. 205,000 psi. Rear posts of body constructed from 3/16" stainless steel.

Body to Include:

Air actuated tailgate, 24" cab protector w/(4) oval amber LED flashers, 27" sides, 39" tailgate, 6.11 cubic yard water level capacity, conveyor cover plate, body safety props, oval amber LED flashers mounted in rear corner post with all other Federal and NYS required lighting (LED s/t/t, LED back-up, LED markers), oval amber LED flashers in each side rear post, 12" rear apron, center coal door, full grease extension set (side tilt, bearings, hoist, chain adjusters), folding grip strut ladder, interior body step, shovel bracket, body up light, poly fenders mounted to body, mud flaps, **Roll-Rite** aluminum electric tarp system, (6) LED work lights (front wing post, rear wing, spinner, front discharge basket, and 2-rear wired to switch), body to be Powder Coated Black, and red/white DOT tape.

Hydraulics to Include:

- Rexroth front engine mounted load sensing 85CC piston pump with driveline and low oil block
- Rexroth 9-section valve body to be mounted behind cab in a **Stainless Steel** enclosure
- Air controls for equipment functions. Swing pedestal for wing controls (FW / RW / RS), center console between seats for plow and body functions (Plow / Rev. Plow / Front Hoist / Side Tilt) Locking handle for front hoist
- **Stainless Steel** reservoir with shut off valves, filter, and sight gauge, mounted between the cab and the body
- Low oil level sensor with automatic shutdown and override control
- Rexroth CS-530 electronic open loop sander control
- Hard pipe to rear of body shall be stainless steel with short hoses as required
- Hydraulic lines to front hitch shall be stainless steel with short hoses as required
- Quick couplers for all detachable equipment
- Plow controls to be mounted per request
- All valves, oils, and controls for the complete operations of dump body, plow equipment, and sander functions

Total Package Price: \$241,500.00 Per Unit

Qty. (4) Units Total: \$966,000.00

All prices and freight terms F.O.B. Origin.

If you have any questions or concerns, please feel free to contact me.

Sincerely,

Glenn F. Plaisted
US Sales Manager
gfp




I, Brian Adams, as a representative of The Town of West Seneca, NY
wish to accept the above listed quotation.

DocuSigned by:
Brian Adams
Signature DB9099FF6401427...

Prepared For:
Town Of West Seneca
Brian Adams
39 South Ave.
West Seneca, NY 14224-2008
(716)674 - 4850
Reference ID: 6x4 vikingstock

Presented By:
ARKEL MOTORS INC
Sean Roche
70 WINDSOR HIGHWAY
NEW WINDSOR NY 12553 -
(845)562-0532

Thank you for the opportunity to provide you with the following quotation on a new International truck. I am sure the following detailed specification will meet your operational requirements, and I look forward to serving your business needs.

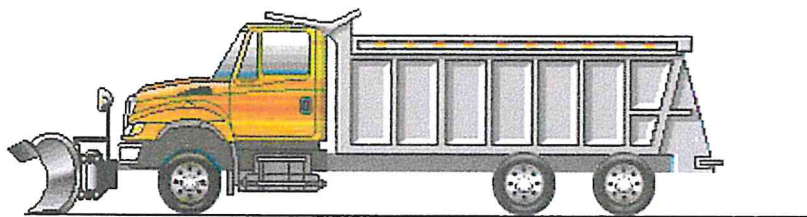

Model Profile
2023 HV513 SFA (HV513)

AXLE CONFIG:	6X4
APPLICATION:	Front Plow and Wing with Spreader
MISSION:	Requested GVWR: 66000. Calc. GVWR: 66000. Calc. GCWR: 130000 Calc. Start / Grade Ability: 32.07% / 2.88% @ 55 MPH Calc. Geared Speed: 73.0 MPH
DIMENSION:	Wheelbase: 217.00, CA: 133.50, Axle to Frame: 57.00
ENGINE, DIESEL:	{International A26} EPA 2021, 450HP @ 1700 RPM, 1700 lb-ft Torque @ 900 RPM, 2100 RPM Governed Speed, 450 Peak HP (Max)
TRANSMISSION, AUTOMATIC:	{Allison 4500 RDS} 5th Generation Controls, Wide Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, On/Off Highway
CLUTCH:	Omit Item (Clutch & Control)
AXLE, FRONT NON-DRIVING:	{Meritor MFS-20-133A} Wide Track, I-Beam Type, 20,000-lb Capacity
AXLE, REAR, TANDEM:	{Meritor RT-46-164EH} Single Reduction, Standard Width, 46,000-lb Capacity, Driver Controlled Locking Differential in Forward-Rear and Rear-Rear Axle, 200 Wheel Ends Gear Ratio: 5.38
CAB:	Conventional, Day Cab
TIRE, FRONT:	(2) 425/65R22.5 Load Range L HAC 3 (CONTINENTAL), 465 rev/mile, 68 MPH, All-Position
TIRE, REAR:	(8) 12R22.5 Load Range H HDC1 (CONTINENTAL), 479 rev/mile, 68 MPH, Drive
SUSPENSION, REAR, TANDEM:	{Hendrickson HMX EX 460} Walking Beam, 46,000-lb Capacity, 54" Axle Spacing, Rubber Springs, with Transverse Torque Rods, Rubber End Bushings
PAINT:	Cab schematic 100WM Location 1: 0311, Omaha Orange (Std) Chassis schematic N/A

Description

Base Chassis, Model HV513 SFA with 217.00 Wheelbase, 133.50 CA, and 57.00 Axle to Frame.

AXLE CONFIGURATION

AXLE CONFIGURATION {Navistar} 6x4

ENGINE

ENGINE, DIESEL {International A26} EPA 2021, 450HP @ 1700 RPM, 1700 lb-ft Torque @ 900 RPM, 2100 RPM Governed Speed, 450 Peak HP (Max)

CARB EMISSION WARR COMPLIANCE Federal, Does Not Comply with CARB Emission Warranty

CARB IDLE COMPLIANCE Low NOx Idle Engine, Complies with California Clean Air Regulations; Includes "Certified Clean Idle" Decal located on Driver Door

EMISSION, CALENDAR YEAR {International A26} EPA, OBD and GHG Certified for Calendar Year 2022

RADIATOR Aluminum, Welded, Cross Flow, Front to Back System, 1292 Sqn, with 1008 Sqn Charge Air Cooler

FAN DRIVE {Horton Drivemaster} Two-Speed Type, Direct Drive, with Residual Torque Device for Disengaged Fan Speed

AIR CLEANER Single Element, with Integral Snow Valve and In-Cab Control

ANTI-FREEZE Red, Extended Life Coolant; To -40 Degrees F/ -40 Degrees C, Freeze Protection

BLOCK HEATER, ENGINE {Phillips} 120V/1150W

COLD STARTING EQUIPMENT Automatic; with Engine ECM Control

ENGINE CONTROL, REMOTE MOUNTED for PTO, for N13/A26 Engines

FAN DRIVE SPECIAL EFFECTS Fan Cooling Ring with Fan Shroud Effects, Engine Mounted

HOSE CLAMPS, RADIATOR HOSES , Mechanical Type; with Constant-Tension Functionality

OIL PAN Stainless Steel, for N13/A26 Engines

PTO EFFECTS, ENGINE FRONT for N13/A26 Engines, Less PTO, Unit, Includes Adapter Plate on Engine Front Mounted

TRANSMISSION

TRANSMISSION, AUTOMATIC {Allison 4500 RDS} 5th Generation Controls, Wide Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, On/Off Highway

TRANSMISSION TCM LOCATION Located Inside Cab

ALLISON SPARE INPUT/OUTPUT for Rugged Duty Series (RDS) and Regional Haul Series (RHS), General Purpose Trucks, Construction, Package Number 223

NEUTRAL AT STOP Allison Transmission Shifts to Neutral When Service Brake is Depressed and Vehicle is at Stop; Remains in Neutral Until Service Brake is Released

OIL COOLER, AUTO TRANSMISSION {Modine} Water to Oil Type

PTO LOCATION Customer Intends to Install PTO at Left Side of Transmission

SHIFT CONTROL PARAMETERS {Allison} 3000 or 4000 Series Transmissions, 3 Speed S1 Secondary Shift Schedule for 5 or 6 Speed

TRANSMISSION COOLER HOSES Stainless Steel

TRANSMISSION OIL Synthetic; 63 thru 76 Pints

TRANSMISSION SHIFT CONTROL Column Mounted Stalk Shifter, Not for Use with Allison 1000 & 2000 Series Transmission

Description**CLUTCH**

CLUTCH Omit Item (Clutch & Control)

REAR AXLES, SUSPENSIONS

AXLE, REAR, TANDEM {Meritor RT-46-164EH} Single Reduction, Standard Width, 46,000-lb Capacity, Driver Controlled Locking Differential in Forward-Rear and Rear-Rear Axle, 200 Wheel Ends . Gear Ratio: 5.38

SUSPENSION, REAR, TANDEM {Hendrickson HMX EX 460} Walking Beam, 46,000-lb Capacity, 54" Axle Spacing, Rubber Springs, with Transverse Torque Rods, Rubber End Bushings

AXLE, REAR, LUBE {EmGard FE-75W-90} Synthetic Oil; 65 thru 89.99 Pints

DIFF. SWITCH CONTROLS Two Independent Switches for Control Traction Differentials on Tandem Rear Axles, Mounted on Dash

PDL WARNING BUZZER Power Divider Lock

REBOUND CONTROL STOPS with Dual Rebound Strap

TORQUE RODS {Hendrickson} TRAAX Rods, Longitudinal Only

TRANSVERSE TORQUE RODS {Hendrickson} TRAAX Rod, Transverse Only

FRONT AXLES

AXLE, FRONT NON-DRIVING {Meritor MFS-20-133A} Wide Track, I-Beam Type, 20,000-lb Capacity

FRONT SUSPENSIONS

SUSPENSION, FRONT, SPRING Multileaf, Shackle Type, 20,000-lb Capacity, Less Shock Absorbers

SPRINGS, FRONT AUXILIARY Air Bag, Right Side Only, Driver Control

CABS, COWLS, BODIES

CAB Conventional, Day Cab

ACCESS, CAB Steel, Driver & Passenger Sides, Two Steps per Door, for use with Day Cab and Extended Cab

AIR CONDITIONER with Integral Heater and Defroster

ARM REST, RIGHT, DRIVER SEAT

CAB INTERIOR TRIM Classic, for Day Cab

CAB REAR SUSPENSION Air Bag Type

CAB SOUND INSULATION Includes Dash Insulator Premium Floormat, and Sound Dampening Patches

COWL TRAY LID

FLOOR, COATING LINE-X, Applied to Interior Cab Floor

FRESH AIR FILTER Attached to Air Intake Cover on Cowl Tray in Front of Windshield Under Hood

GAUGE CLUSTER Base Level; English with English Electronic Speedometer

GAUGE, AIR CLEANER RESTRICTION {Filter-Minder} with Black Bezel, Mounted in Instrument Panel

GAUGE, TEMPERATURE, AMBIENT Sensor Wiring with Display Unit Mounted in Cluster

GRAB HANDLE, EXTERIOR Chrome, Towel Bar Type, with Anti-Slip Rubber Inserts, for Cab Entry Mounted Left Side at B-Pillar

INSTRUMENT PANEL Flat Panel

Description

IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster

MIRROR, CONVEX, LOOK DOWN Right Side, Black, 6" x 10.5"

MIRRORS (2) C-Loop, Power Adjust, Heated, Black Heads and Arms, 7.5" x 14" Flat Glass, Includes 7.5" x 7" Convex Mirrors, for 102" Load Width

MODESTY PANEL Painted

SEAT, DRIVER {National 2000} Air Suspension, High Back with Integral Headrest, Vinyl, Isolator, 1 Chamber Lumbar, with 2 Position Front Cushion Adjust, -3 to +14 Degree Angle Back Adjust

SEAT, PASSENGER {Seats, Inc.} Non Suspension, High Back, Fixed Back, Integral Headrest, Vinyl, for use with Batteries in Cab

WINDOW, POWER (2) and Power Door Locks, Left and Right Doors, Includes Express Down Feature

WINDSHIELD Heated, Single Piece

WINDSHIELD WIPER BLADES Snow Type

FRAMES

FRAME RAILS Heat Treated Alloy Steel (125,000 PSI Yield); 11.25" x 4.00" x 0.500" (285.75mm x 101.6mm x 12.7mm); 480.8" (12212mm) Maximum OAL

BUMPER, FRONT Swept Back, Steel, Heavy Duty

CROSSMEMBER, FRONT for Hydraulic Pump, Mounting Flange to Accommodate Pump

CROSSMEMBER, INTERMEDIATE (1) 5-Piece in lieu of Each Single Dogbone with 4x2 & 4x4 Chassis; Each Double Dogbone with 6x4, 6x6 & 8x6 Tridem Chassis

CROSSMEMBER, SUSPENSION (2) 5-Piece Steel in lieu of (2) Double Dogbone, Forward and Rear

FRAME EXTENSION, FRONT Integral; 20" In Front of Grille

WHEELBASE RANGE 199" (505cm) Through and Including 264" (670cm)

BRAKES

BRAKE SYSTEM, AIR Dual System for Straight Truck Applications

AIR BRAKE ABS {Bendix AntiLock Brake System} 4-Channel (4 Sensor/4 Modulator) Full Vehicle Wheel Control System

BRAKES, FRONT {Meritor 16.5X6 Q-PLUS CAST} Air S-Cam Type, Cast Spider, Fabricated Shoe, Double Anchor Pin, Size 16.5" X 6", 20,000-lb Capacity

BRAKE CHAMBERS, FRONT AXLE {Bendix} 24 Sqli

SLACK ADJUSTERS, FRONT {Haldex} Automatic

SLACK ADJUSTER PINS Stainless Steel Slack Adjuster Pins/Cotter Pins on Front and Rear

BRAKE ANCHOR PINS, FRONT Zinc Chromate, for use with Front Meritor Air S-Cam Brakes

BRAKE COATING, FRONT Platinum Shield, for Meritor Air S-Cam Brakes

DUST SHIELDS, FRONT BRAKE for Air Cam Brakes

BRAKES, REAR {Meritor 16.5X7 Q-PLUS CAST} Air S-Cam Type, Cast Spider, Fabricated Shoe, Double Anchor Pin, Size 16.5" X 7", 23,000-lb Capacity per Axle

BRAKE CHAMBERS, REAR AXLE {Bendix EverSure} 30/30 Sqli Spring Brake

SLACK ADJUSTERS, REAR {Haldex} Automatic

BRAKE ANCHOR PINS, REAR Zinc Chromate, for use with Rear Meritor Air S-Cam Brakes

Description

BRAKE COATING, REAR Platinum Shield, for Meritor Air S-Cam Brakes
BRAKE CHAMBERS, POSITION on Rear/Rear Axle Located Inside Rear Tire Envelope (Meets Asphalt Spreader/Paver Clearance Requirements)
PARK BRAKE CHAMBERS, ADDITIONAL (2) Spring Brake Type
DUST SHIELDS, REAR BRAKE for Air Cam Brakes
AIR COMPRESSOR {Bendix BA-921 Head Unload} 15.9 CFM
AIR DRYER {Wabco System Saver 1200} with Heater
AIR DRYER LOCATION Mounted Inside Right Rail, Back of Cab
AIR TANK Painted Aluminum, with Straight Thread O-Ring Ports
AIR TANK LOCATION (2) : One Mounted Under Each Rail, Front of Rear Suspension, Parallel to Rail
DRAIN VALVE {Berg} with Pull Chain, for Air Tank
TRAILER CONNECTIONS Four-Wheel, with Hand Control Valve and Tractor Protection Valve, for Straight Truck

STEERING

STEERING GEAR (2) {Sheppard M100/M80} Dual Power
POWER STEERING HOSE Stainless Steel Steering Lines on Steering Pump
STEERING COLUMN Tilting
STEERING WHEEL 4-Spoke; 18" Dia., Black

DRIVELINES

DRIVELINE SYSTEM {Dana Spicer} SPL250 Main Driveline with SPL170 Interaxle Shaft, for 6x4

EXHAUST SYSTEMS

EXHAUST SYSTEM Horizontal Aftertreatment System, Frame Mounted Right Side Under Cab, for Single Vertical Tail Pipe, Frame Mounted Right Side Back of Cab
AFTERTREATMENT COVER Steel, Black
ENGINE COMPRESSION BRAKE by Jacobs; for N13/A26 Engines, with Selector Switch and On/Off Switch
EXHAUST HEIGHT 10'
MUFFLER/TAIL PIPE GUARD (1) Aluminum
TAIL PIPE (1) Turnback Type

ELECTRICAL SYSTEMS

ELECTRICAL SYSTEM 12-Volt, Standard Equipment
ALARM, PARKING BRAKE Electric Horn Sounds in Repetitive Manner when Vehicle Park Brake is "NOT" Set, with Ignition "ON" or "OFF" and any Door Opened
ALTERNATOR {Leece-Neville AVI160P2013} Brush Type, 12 Volt, 160 Amp Capacity, Pad Mount
ANTENNA Shark Fin, Roof Mounted
AUXILIARY HARNESS 3.0' for Auxiliary Front Head Lights and Turn Signals for Front Plow Applications
BACK-UP ALARM Electric, 102 dBA

Description

BATTERY BOX Steel, 2-3 Battery Capacity, Mounted Inside the Cab, Under Passenger Seat

BATTERY DISCONNECT SWITCH {Joseph Pollak} for Cab Power Disconnect Switch, Disconnects Power to Power Distribution Center (PDC), Does Not Disconnect Charging Circuits, Lever Operated, Cab Mounted

BATTERY SYSTEM {Deka/EAST PENN 9A31 AGM} Maintenance-Free, (3) AGM 12-Volt 2775CCA Total, Top Threaded Stud

BODY BUILDER WIRING Back of Day Cab at Left Frame or Under Sleeper, Extended or Crew Cab at Left Frame; Includes Sealed Connectors for Tail/Amber Turn/Marker/ Backup/Accessory Power/Ground and Sealed Connector for Stop/Turn

2-WAY RADIO Wiring Effects; Wiring with 20 Amp Fuse Protection, Includes Ignition Wire with 5 Amp Fuse, Wire Ends Heat Shrink and Routed to Center of Header Console in Cab

CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III with Trip Indicators, Replaces All Fuses

CIGAR LIGHTER Includes Ash Cup

CLEARANCE/MARKER LIGHTS (5) {Truck Lite} Amber LED Lights, Flush Mounted on Cab or Sunshade

ELECTRIC TRAILER BRAKE/LIGHTS Accommodation Package to Rear of Frame; for Combined Trailer Stop, Tail, Turn, Marker Light Circuits; Includes Electric Trailer Brake Accommodation Package with Cab Connections for Mounting Customer Installed Electric Brake Unit, Less Trailer Socket

HEADLIGHTS Halogen

HEADLIGHTS ON W/WIPERS Headlights Will Automatically Turn on if Windshield Wipers are turned on

HORN, AIR (2) Single Tone, Chrome, Roof Mounted, with Lanyard Pull Cord

HORN, ELECTRIC (2) Disc Style

JUMP START STUD (2) Remote Mounted

POWER SOURCE, ADDITIONAL Auxiliary Power Outlet (APO) with USB Port, Located in the Instrument Panel

RADIO AM/FM/WB/Clock/Bluetooth/USB Input/Auxiliary Input

RADIO, AUXILIARY CONTROLS Mounted in Steering Wheel, Radio Function Control Switch, Includes Volume Up/Down, Mute, Forward/Back and Bluetooth Answer/Disconnect

SNOW SHIELD (2) Chrome; for Dual Air Horns

SPEAKERS (2) 6.5" Dual Cone Mounted in Both Doors, (2) 5.25" Dual Cone Mounted in Both B-Pillars

STARTING MOTOR {Mitsubishi Electric Automotive America 105P} 12-Volt, with Soft-Start

TEST EXTERIOR LIGHTS Pre-Trip Inspection will Cycle all Exterior Lamps Except Back-up Lights

TRAILER AUXILIARY FEED CIRCUIT for Electric Trailer Brake Accommodation/Air Trailer ABS; with 30 Amp Fuse and Relay, Controlled by Ignition Switch

TURN SIGNALS, FRONT Includes LED Side Turn Lights Mounted on Fender

WINDSHIELD WIPER SPD CONTROL Force Wipers to Slowest Intermittent Speed When Park Brake Set and Wipers Left on for a Predetermined Time

FRONT END

FRONT END Tilting, Fiberglass, with Three Piece Construction, Includes Long Hood

BUG SCREEN Mounted Behind Grille

FENDER EXTENSIONS Rubber

GRILLE Stationary, Chrome

HOOD, HATCH (01) for Servicing

Description

INSULATION, SPLASH PANELS for Sound Abatement

LOGOS EXTERIOR Model Badges

LOGOS EXTERIOR, ENGINE Badges

SPEEDOMETER, TOOLS, MISC

CHASSIS COATING Corrosion Resistant E-Coat Primer Coating for Single Frame Rails

COMMUNICATIONS MODULE Telematics Device with Over the Air Programming; Includes Two Year Data Plan

FIRE EXTINGUISHER 5 lb Class A B C

FIRE EXTINGUISHER BRACKET Mounted Left Side Driver Seat

PAINT SCHEMATIC, PT-1 Single Color, Design 100

PAINT TYPE Base Coat/Clear Coat, 1-2 Tone

PROMOTIONAL PACKAGE Government Silver Package

FUEL TANKS

FUEL TANK Top Draw, Non-Polished Aluminum, D-Style, 19" Tank Depth, 70 US Gal (265L), Mounted Left Side, Under Cab

DEF TANK 9.5 US Gal (36L) Capacity, Frame Mounted Outside Left Rail, Under Cab

FUEL COOLER Less Thermostat; Mounted in Front of Cooling Module

FUEL/WATER SEPARATOR {Racor 6600} 12 VDC Electric Heater, Includes Pre-Heater, Fuel Heated with Fuel Blender Valve, with Sight Bowl, Includes Water-In-Fuel Sensor

LOCATION FUEL/WATER SEPARATOR Mounted Inside Left Rail, Back of Cab

WHEELS, TIRES - FRONT

WHEELS, FRONT DISC; 22.5x12.25 Rims, Non-Polished Aluminum, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs

(2) TIRE, FRONT 425/65R22.5 Load Range L HAC 3 (CONTINENTAL), 465 rev/mile, 68 MPH, All-Position

WHEELS, TIRES - REAR

WHEELS, REAR {Accuride 42644} DUAL DISC; 22.5x8.25 Rims, Standard Polish Aluminum, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs

(8) TIRE, REAR 12R22.5 Load Range H HDC1 (CONTINENTAL), 479 rev/mile, 68 MPH, Drive

WHEELS MISC OPTIONS

WHEEL GUARDS, FRONT {Accuride} for Metric Hub Piloted Wheels with Flanged Mounting Nuts Mounted Between Hub and Wheel

BODY INTEGRATION

BDY INTG, REMOTE POWER MODULE Mounted Inside Cab Behind Driver Seat, Up to 6 Outputs & 6 Inputs, Max 20 amp per Channel, Max 80 amp Total; Includes 1 Switch Pack with Latched Switches

BDY INTG, INDICATOR LIGHTS (2) 1 for Body Up, 1 for Gate Open, Includes Audible Alarm, Programmable Mode for Various Switch Actions. (Requires 2 Remote Power Module Inputs)

BDY INTG, PTO ACCOMMODATION for Electric over Hydraulic PTO, Does Not Include Solenoids, with Latched Switch Mounted on Dash Includes Audible Alarm and Indicator Light in Gauge Cluster (Requires 1 Remote Power Module input & 1 output)

Description

Services Section:

WARRANTY

WARRANTY Standard for HV513, HV613 Models, Effective with Vehicles Built July 1, 2017 or Later, CTS-2030A

SRV CONTRACT, EXT ENGINE/AFTR {Navistar} To 60-Month/100,000 Miles (160,000 km), Includes Engine, Engine Electronics, Turbocharger, Water Pump and Fuel Injectors, Aftertreatment Coverage for International A26 Engines

SRV CONTRACT, EXT ALLISON XMSN {Allison} To 60-Month/Unlimited Miles/km, for Allison 4500 RDS with Dump Truck or Mixer Vocations (ST01, ST06, ST07)

Body/Allied Equipment

Description

Viking Civies Dump Body and equipment

Goods Purchased

Description

raw materials surcharge

tire surcharge

<u>Description</u>	<u>(US DOLLAR)</u>	<u>Price</u>
Factory List Prices:		
Product Items	\$265,534.00	
Service Items	\$6,352.00	
Total Factory List Price Including Options:		\$271,886.00
Total Goods Purchased:		\$4,300.00
Freight Charge	\$2,600.00	
Total Freight:		\$2,600.00
Total Factory List Price Including Freight:		\$278,786.00
Less Customer Allowance:		(\$132,106.60)
Total Vehicle Price:		\$146,679.40
Total Body/Allied Equipment:		\$95,200.60
Total Sale Price:		\$241,880.00
Total Per Vehicle Sales Price:		\$241,880.00
Total Net Sales Excluding Taxes:		\$241,880.00
Dealer Fee, NYS Inspection,	\$95.00	
Tire Tax 2.50 per tire 6x4	\$25.00	
Total License, Title, & Taxes:		\$120.00
Net Sales Price:		\$242,000.00

Please feel free to contact me regarding these specifications should your interests or needs change. I am confident you will be pleased with the quality and service of an International vehicle.

Approved by Seller:

Accepted by Purchaser:

Official Title and Date

Firm or Business Name

Authorized Signature

Authorized Signature and Date

This proposal is not binding upon the seller without Seller's Authorized Signature

Official Title and Date


The TOPS FET calculation is an estimate for reference purposes only. The seller or retailer is responsible for calculating and reporting/paying appropriate FET to the IRS.

The limited warranties applicable to the vehicles described herein are Navistar, Inc.'s standard printed warranties which are incorporated herein by reference and to which you have been provided a copy and hereby agree to their terms and conditions.

Prepared For:
 Town Of West Seneca
 Brian Adams
 39 South Ave.
 West Seneca, NY 14224-2008
 (716)674 - 4850
 Reference ID: N/A

Presented By:
 ARKEL MOTORS INC
 Sean Roche
 70 WINDSOR HIGHWAY
 NEW WINDSOR NY 12553 -
 (845)562-0532

Thank you for the opportunity to provide you with the following quotation on a new International truck. I am sure the following detailed specification will meet your operational requirements, and I look forward to serving your business needs.

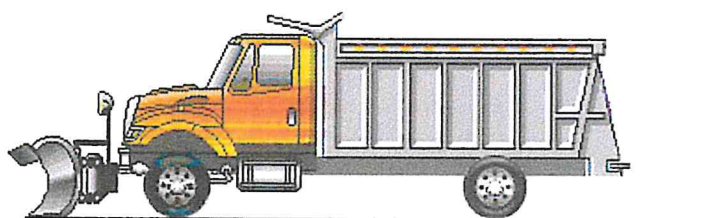

Model Profile
2022 HV507 SFA (HV507)

AXLE CONFIG: 4X2
APPLICATION: Front Plow and Wing with Spreader
MISSION: Requested GVWR: 50000. Calc. GVWR: 47760. Calc. GCWR: 80000
 Calc. Start / Grade Ability: 26.24% / 3.06% @ 55 MPH
 Calc. Geared Speed: 65.9 MPH

DIMENSION: Wheelbase: 171.00, CA: 96.00, Axle to Frame: 49.00
ENGINE, DIESEL: {Cummins L9 370} EPA 2021, 370HP @ 2100 RPM, 1250 lb-ft Torque @ 1200 RPM, 2100 RPM Governed Speed, 370 Peak HP (Max)

TRANSMISSION, AUTOMATIC: {Allison 3000 RDS} 5th Generation Controls, Close Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, with 80,000-lb GVW and GCW Max, On/Off Highway

CLUTCH: Omit Item (Clutch & Control)

AXLE, FRONT NON-DRIVING: {Meritor MFS-20-133A} Wide Track, I-Beam Type, 20,000-lb Capacity
AXLE, REAR, SINGLE: {Meritor RS-30-185} Single Reduction, 30,000-lb Capacity, Driver Controlled Locking Differential, T Wheel Ends Gear Ratio: 6.14

CAB: Conventional, Day Cab
TIRE, FRONT: (2) 315/80R22.5 Load Range L HSC 3 (CONTINENTAL), 481 rev/mile, 68 MPH, All-Position
TIRE, REAR: (4) 12R22.5 Load Range H HDC1 (CONTINENTAL), 479 rev/mile, 68 MPH, Drive
SUSPENSION, REAR, SINGLE: 31,000-lb Capacity, Vari-Rate Springs, with 4500-lb Capacity Auxiliary Multileaf Springs
PAINT: Cab schematic 100WK
 Location 1: 0311, Omaha Orange (Std)
 Chassis schematic N/A

Description

Base Chassis, Model HV507 SFA with 171.00 Wheelbase, 96.00 CA, and 49.00 Axle to Frame.

AXLE CONFIGURATION

AXLE CONFIGURATION {Navistar} 4x2

ENGINE

ENGINE, DIESEL {Cummins L9 370} EPA 2021, 370HP @ 2100 RPM, 1250 lb-ft Torque @ 1200 RPM, 2100 RPM Governed Speed, 370 Peak HP (Max)

CARB IDLE COMPLIANCE Low NOx Idle Engine, Complies with California Clean Air Regulations; Includes "Certified Clean Idle" Decal located on Driver Door

EMISSION, CALENDAR YEAR {Cummins L9} EPA, OBD and GHG Certified for Calendar Year 2021

RADIATOR Aluminum, Cross Flow, Front to Back System, 1228 SqIn, with 1167 SqIn Charge Air Cooler, Includes In-Tank Oil Cooler

FAN DRIVE {Horton Drivemaster} Two-Speed Type, Direct Drive, with Residual Torque Device for Disengaged Fan Speed

AIR CLEANER Single Element, with Integral Snow Valve and In-Cab Control

ANTI-FREEZE Red, Extended Life Coolant; To -40 Degrees F/ -40 Degrees C, Freeze Protection

BLOCK HEATER, ENGINE 120V/1000W, for Cummins ISB/B6.7/ISL/L9 Engines

ENGINE CONTROL, REMOTE MOUNTED Provision for; Includes Wiring for Body Builder Installation of PTO Controls and Starter Lockout, with Ignition Switch Control, for Cummins B6.7 and L9 Engines

HOSE CLAMPS, RADIATOR HOSES {R.G. Ray Mini Flex Seal} Coil Spring/"T"-Bolt Constant Torque Type, for Radiator Hoses over 1" I.D.

THROTTLE, HAND CONTROL Engine Speed Control; Electronic, Stationary, Variable Speed; Mounted on Steering Wheel

TRANSMISSION

TRANSMISSION, AUTOMATIC {Allison 3000 RDS} 5th Generation Controls, Close Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, with 80,000-lb GVW and GCW Max, On/Off Highway

TRANSMISSION TCM LOCATION Located Inside Cab

ALLISON SPARE INPUT/OUTPUT for Rugged Duty Series (RDS) and Regional Haul Series (RHS), General Purpose Trucks, Construction, Package Number 223

NEUTRAL AT STOP Allison Transmission Shifts to Neutral When Service Brake is Depressed and Vehicle is at Stop; Remains in Neutral Until Service Brake is Released

PTO LOCATION Customer Intends to Install PTO at Left Side of Transmission

SHIFT CONTROL PARAMETERS {Allison} 3000 or 4000 Series Transmissions, 3 Speed S1 Secondary Shift Schedule for 5 or 6 Speed

TRANSMISSION COOLER HOSES Stainless Steel

TRANSMISSION OIL Synthetic; 29 thru 42 Pints

TRANSMISSION SHIFT CONTROL Column Mounted Stalk Shifter, Not for Use with Allison 1000 & 2000 Series Transmission

CLUTCH

CLUTCH Omit Item (Clutch & Control)

REAR AXLES, SUSPENSIONS

Description

AXLE, REAR, SINGLE {Meritor RS-30-185} Single Reduction, 30,000-lb Capacity, Driver Controlled Locking Differential, T Wheel Ends .
Gear Ratio: 6.14

SUSPENSION, REAR, SINGLE 31,000-lb Capacity, Vari-Rate Springs, with 4500-lb Capacity Auxiliary Multileaf Springs

AXLE, REAR, LUBE {EmGard FE-75W-90} Synthetic Oil; 40 thru 49.99 Pints

FRONT AXLES

AXLE, FRONT NON-DRIVING {Meritor MFS-20-133A} Wide Track, I-Beam Type, 20,000-lb Capacity

FRONT SUSPENSIONS

SUSPENSION, FRONT, SPRING Parabolic Taper Leaf, Shackle Type, 20,000-lb Capacity, with Shock Absorbers

SPRINGS, FRONT AUXILIARY Air Bag, Right Side Only, Driver Control

CABS, COWLS, BODIES

CAB Conventional, Day Cab

ACCESS, CAB Steel, Driver & Passenger Sides, Two Steps per Door, for use with Day Cab and Extended Cab

AIR CONDITIONER with Integral Heater and Defroster

ARM REST, RIGHT, DRIVER SEAT

CAB INTERIOR TRIM Classic, for Day Cab

CAB REAR SUSPENSION Air Bag Type

CAB SOUND INSULATION Includes Dash Insulator and Engine Cover Insulator

COWL TRAY LID

FLOOR, COATING LINE-X, Applied to Interior Cab Floor

FRESH AIR FILTER Attached to Air Intake Cover on Cowl Tray in Front of Windshield Under Hood

GAUGE CLUSTER Base Level; English with English Electronic Speedometer

GAUGE, AIR CLEANER RESTRICTION {Filter-Minder} with Black Bezel, Mounted in Instrument Panel

GAUGE, TEMPERATURE, AMBIENT Sensor Wiring with Display Unit Mounted in Cluster

GRAB HANDLE, EXTERIOR Chrome, Towel Bar Type, with Anti-Slip Rubber Inserts, for Cab Entry Mounted Left Side at B-Pillar

INSTRUMENT PANEL Flat Panel

IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster

MIRROR, CONVEX, LOOK DOWN Right Side, Black, 6" x 10.5"

MIRRORS (2) Aero Pedestal, Power Adjust, Heated, Black Heads and Arms, 6.5" x 14" Flat Glass, Includes 6.5" x 6" Convex Mirrors, for 102" Load Width

SEAT, DRIVER {National 2000} Air Suspension, High Back with Integral Headrest, Vinyl, Isolator, 1 Chamber Lumbar, with 2 Position Front Cushion Adjust, -3 to +14 Degree Angle Back Adjust

SEAT, PASSENGER {Seats, Inc.} Non Suspension, High Back, Fixed Back, Integral Headrest, Vinyl, for use with Batteries in Cab

SUNSHADE, EXTERIOR Aerodynamic, Painted Roof Color, with Integral Clearance/Marker Lights

WINDOW, POWER (2) and Power Door Locks, Left and Right Doors, Includes Express Down Feature

WINDSHIELD Heated, Single Piece

Description

WINDSHIELD WIPER BLADES Snow Type

FRAMES

FRAME RAILS Heat Treated Alloy Steel (120,000 PSI Yield); 10.866" x 3.622" x 0.437" (276.0mm x 92.0mm x 11.1mm); 456.0" (11582mm) Maximum OAL

BUMPER, FRONT Swept Back, Steel, Heavy Duty

FRAME EXTENSION, FRONT Integral; 20" In Front of Grille

FRAME, SPECIAL EFFECTS Dimple on Left and Right Top Flange of Frame Rail to Reference Rear Axle Centerline

WHEELBASE RANGE 146" (370cm) Through and Including 195" (495cm)

BRAKES

BRAKE SYSTEM, AIR Dual System for Straight Truck Applications

AIR BRAKE ABS {Bendix AntiLock Brake System} 4-Channel (4 Sensor/4 Modulator) Full Vehicle Wheel Control System

BRAKES, FRONT {Meritor 16.5X6 Q-PLUS CAST} Air S-Cam Type, Cast Spider, Fabricated Shoe, Double Anchor Pin, Size 16.5" X 6", 20,000-lb Capacity

BRAKE CHAMBERS, FRONT AXLE {Bendix} 24 SqIn

SLACK ADJUSTERS, FRONT {Haldex} Automatic

SLACK ADJUSTER PINS Stainless Steel Slack Adjuster Pins/Cotter Pins on Front and Rear

BRAKE ANCHOR PINS, FRONT Zinc Chromate, for use with Front Meritor Air S-Cam Brakes

DUST SHIELDS, FRONT BRAKE for Air Cam Brakes

BRAKES, REAR {Meritor 16.5X8.625 CAST PLUS} Air S-Cam Type, Cast Spider, Cast Shoe, Double Anchor Pin, Size 16.5" X 8.625", 38,000-lb Capacity per Axle

BRAKE CHAMBERS, REAR AXLE {Bendix EverSure} 30/30 SqIn Spring Brake

SLACK ADJUSTERS, REAR {Haldex} Automatic

BRAKE ANCHOR PINS, REAR Zinc Chromate, for use with Rear Meritor Air S-Cam Brakes

DUST SHIELDS, REAR BRAKE for Air Cam Brakes

AIR COMPRESSOR {Cummins} 18.7 CFM

AIR DRYER {Wabco System Saver 1200} with Heater

AIR DRYER LOCATION Mounted Inside Left Rail, Back of Cab

AIR TANK Painted Aluminum, with Straight Thread O-Ring Ports

AIR TANK LOCATION (2) : One Mounted Under Each Rail, Front of Rear Suspension, Parallel to Rail

DRAIN VALVE {Berg} with Pull Chain, for Air Tank

TRAILER CONNECTIONS Four-Wheel, with Hand Control Valve and Tractor Protection Valve, for Straight Truck

STEERING

STEERING GEAR (2) {Sheppard M100/M80} Dual Power

STEERING COLUMN Tilting

STEERING WHEEL 4-Spoke; 18" Dia., Black

Description
DRIVELINES

DRIVELINE SYSTEM {Dana Spicer} SPL170, for 4x2/6x2

EXHAUST SYSTEMS

EXHAUST SYSTEM Horizontal Aftertreatment System, Frame Mounted Right Side Under Cab, for Single Vertical Tail Pipe, Frame Mounted Right Side Back of Cab

AFTERTREATMENT COVER Steel, Black

ENGINE COMPRESSION BRAKE {Jacobs} for Cummins ISL/L9 Engines; with Selector Switch and On/Off Switch

EXHAUST HEIGHT 10'

MUFFLER/TAIL PIPE GUARD (1) Aluminum

TAIL PIPE (1) Turnback Type

ELECTRICAL SYSTEMS

ELECTRICAL SYSTEM 12-Volt, Standard Equipment

ACCESSORY WIRING, SPECIAL for Road Speed Wire Coiled Under Instrument Panel for Customer Use

ALARM, PARKING BRAKE Electric Horn Sounds in Repetitive Manner when Vehicle Park Brake is "NOT" Set, with Ignition "ON" or "OFF" and any Door Opened

ALTERNATOR {Leece-Neville AVI160P2013} Brush Type, 12 Volt, 160 Amp Capacity, Pad Mount, with Remote Sense

ANTENNA Shark Fin, Roof Mounted

AUXILIARY HARNESS 3.0' for Auxiliary Front Head Lights and Turn Signals for Front Plow Applications

BACK-UP ALARM Electric, 102 dBA

BATTERY BOX Steel, 2-3 Battery Capacity, Mounted Inside the Cab, Under Passenger Seat

BATTERY DISCONNECT SWITCH 300 Amp, Disconnects Charging Circuits, Locks with Padlock, Cab Mounted

BATTERY SYSTEM {Deka/EAST PENN 9A31 AGM} Maintenance-Free, (3) AGM 12-Volt 2775CCA Total, Top Threaded Stud

BODY BUILDER WIRING Back of Day Cab at Left Frame or Under Sleeper, Extended or Crew Cab at Left Frame; Includes Sealed Connectors for Tail/Amber Turn/Marker/ Backup/Accessory Power/Ground and Sealed Connector for Stop/Turn

2-WAY RADIO Wiring Effects; Wiring with 20 Amp Fuse Protection, Includes Ignition Wire with 5 Amp Fuse, Wire Ends Heat Shrink and 10' Coil Taped to Base Harness

CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III with Trip Indicators, Replaces All Fuses

CIGAR LIGHTER Includes Ash Cup

CLEARANCE/MARKER LIGHTS (5) {Truck Lite} Amber LED Lights, Flush Mounted on Cab or Sunshade

ELECTRIC TRAILER BRAKE/LIGHTS Accommodation Package to Rear of Frame; for Combined Trailer Stop, Tail, Turn, Marker Light Circuits; Includes Electric Trailer Brake Accommodation Package with Cab Connections for Mounting Customer Installed Electric Brake Unit, Less Trailer Socket

HEADLIGHT WARNING BUZZER Sounds When Head Light Switch is on and Ignition Switch is in "Off" Position

HEADLIGHTS Halogen, with Daytime Running Lights

HORN, AIR Single Trumpet, Black, with Lanyard Pull Cord

HORN, ELECTRIC (2) Disc Style

INDICATOR, LOW COOLANT LEVEL with Audible Alarm

Description

JUMP START STUD (2) Remote Mounted

POWER SOURCE, ADDITIONAL Auxiliary Power Outlet (APO) with USB Port, Located in the Instrument Panel

RADIO AM/FM/WB/Clock/Bluetooth/USB Input/Auxiliary Input

RADIO, AUXILIARY CONTROLS Mounted in Steering Wheel, Radio Function Control Switch, Includes Volume Up/Down, Mute, Forward/Back and Bluetooth Answer/Disconnect

SPEAKERS (2) 6.5" Dual Cone Mounted in Both Doors, (2) 5.25" Dual Cone Mounted in Both B-Pillars

STARTING MOTOR {Mitsubishi Electric Automotive America 105P} 12-Volt, with Soft-Start

TEST EXTERIOR LIGHTS Pre-Trip Inspection will Cycle all Exterior Lamps Except Back-up Lights

TRAILER AUXILIARY FEED CIRCUIT for Electric Trailer Brake Accommodation/Air Trailer ABS; with 30 Amp Fuse and Relay, Controlled by Ignition Switch

TURN SIGNALS, FRONT Includes LED Side Turn Lights Mounted on Fender

WINDSHIELD WIPER SPD CONTROL Force Wipers to Slowest Intermittent Speed When Park Brake Set and Wipers Left on for a Predetermined Time

FRONT END

FRONT END Tilting, Fiberglass, with Three Piece Construction, for WorkStar/HV

BUG SCREEN Mounted Behind Grille

FENDER EXTENSIONS Rubber

GRILLE Stationary, Chrome

HOOD, HATCH (01) for Servicing

INSULATION, SPLASH PANELS for Sound Abatement

INSULATION, UNDER HOOD for Sound Abatement

LOGOS EXTERIOR Model Badges

LOGOS EXTERIOR, ENGINE Badges

SPEEDOMETER, TOOLS, MISC

CHASSIS COATING Corrosion Resistant E-Coat Primer Coating for Single Frame Rails

FIRE EXTINGUISHER 5 lb Class A B C

FIRE EXTINGUISHER BRACKET Mounted Left Side Driver Seat

PAINT SCHEMATIC, PT-1 Single Color, Design 100

PAINT TYPE Base Coat/Clear Coat, 1-2 Tone

PROMOTIONAL PACKAGE Government Silver Package

SAFETY TRIANGLES

FUEL TANKS

FUEL TANK Top Draw, Non-Polished Aluminum, D-Style, 19" Tank Depth, 70 US Gal (265L), Mounted Left Side, Under Cab

DEF TANK 7 US Gal (26L) Capacity, Frame Mounted Outside Left Rail, Under Cab

FUEL/WATER SEPARATOR {Racor 400 Series} 12 VDC Electric Heater, Includes Pre-Heater, with Primer Pump, Includes Water-in-Fuel Sensor, Mounted on Engine

Description

WHEELS, TIRES - FRONT

WHEELS, FRONT {Accuride 41730} DISC; 22.5x9.00 Rims, Standard Polish Aluminum, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs

(2) TIRE, FRONT 315/80R22.5 Load Range L HSC 3 (CONTINENTAL), 481 rev/mile, 68 MPH, All-Position

WHEELS, TIRES - REAR

WHEELS, REAR {Accuride 42644} DUAL DISC; 22.5x8.25 Rims, Standard Polish Aluminum, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs

(4) TIRE, REAR 12R22.5 Load Range H HDC1 (CONTINENTAL), 479 rev/mile, 68 MPH, Drive

WHEELS MISC OPTIONS

COATING IDENTITY, FRONT WHEELS {Accuride Accu-Shield} Disc Front Wheels, Aluminum, with Vendor Applied Clear Coat, Not for Wide Base

COATING IDENTITY, REAR WHEELS {Accuride Accu-Shield} Disc Rear Wheels, Aluminum, with Vendor Applied Clear Coat, Not for Super Single/Wide Base

WHEEL GUARDS, FRONT {Accuride} for Metric Hub Piloted Wheels with Flanged Mounting Nuts Mounted Between Hub and Wheel

BODY INTEGRATION

BDY INTG, REMOTE POWER MODULE Mounted Inside Cab Behind Driver Seat, Up to 6 Outputs & 6 Inputs, Max 20 amp per Channel, Max 80 amp Total; Includes 1 Switch Pack with Latched Switches

BDY INTG, INDICATOR LIGHTS (2) 1 for Body Up, 1 for Gate Open, Includes Audible Alarm, Programmable Mode for Various Switch Actions. (Requires 2 Remote Power Module Inputs)

BDY INTG, PTO ACCOMMODATION for Electric over Hydraulic PTO, Does Not Include Solenoids, with Latched Switch Mounted on Dash Includes Audible Alarm and Indicator Light in Gauge Cluster (Requires 1 Remote Power Module input & 1 output)

Services Section:

WARRANTY

WARRANTY Standard for HV507, HV50B, HV607 Models, Effective with Vehicles Built July 1, 2017 or Later, CTS-2025A

SRV CONTRACT, EXT ALLISON XMSN {Allison} To 60-Month/Unlimited Miles/km, for Allison 3000 RDS with Dump Truck or Mixer Vocations (ST01, ST06, ST07)

Body/Allied Equipment

Description

Viking Civies dump body and equipment

Goods Purchased

Description

Raw Materials Surcharge

<u>Description</u>	(US DOLLAR)	<u>Price</u>
Factory List Prices:		
Product Items	\$156,997.00	
Service Items	\$1,264.00	
Total Factory List Price Including Options:		\$158,261.00
Total Goods Purchased:		\$500.00
Freight Charge	\$2,350.00	
Total Freight:		\$2,350.00
Total Factory List Price Including Freight:		\$161,111.00
Less Customer Allowance:		(\$48,878.60)
Total Vehicle Price:		\$112,232.40
Total Body/Allied Equipment:		\$91,467.60
Total Sale Price:		\$203,700.00
Total Per Vehicle Sales Price:		\$203,700.00
Net Sales Price:		\$203,700.00

Please feel free to contact me regarding these specifications should your interests or needs change. I am confident you will be pleased with the quality and service of an International vehicle.

Approved by Seller:

Accepted by Purchaser:

Official Title and Date

Firm or Business Name

Authorized Signature

Authorized Signature and Date

This proposal is not binding upon the seller without Seller's Authorized Signature

Official Title and Date

The TOPS FET calculation is an estimate for reference purposes only. The seller or retailer is responsible for calculating and reporting/paying appropriate FET to the IRS.

The limited warranties applicable to the vehicles described herein are Navistar, Inc.'s standard printed warranties which are incorporated herein by reference and to which you have been provided a copy and hereby agree to their terms and conditions.



Cives Corporation, dba
 Viking Cives (USA)
 14331 Mill Street
 Harrisville, NY 13648
 Phone: (716) 622-7071
 Fax: (716) 568-8426
 www.vikingcives.com

QUOTATION

Quote ID: 322

Page 1 of 4

EMERGENCY
 PURCHASE

Customer: ARKEL MOTORS
Contact: SEAN
Address: 70 WINDSOR HWY
 NEW WINDSOR NY 12550

Phone: 845-562-0532

Fax:
Attn:

Quote Number: 322Rev#1
Quote Date: 2/20/2022
Quote valid until: 6/30/2022
For: Single Axle West
 Seneca Highway
Terms: Net 30 days
Salesperson: RICH
 WAINWRIGHT
FOB: Destination

QUANTITY	DESCRIPTION	UNIT PRICE	AMOUNT
1	HITCH FOR FACTORY MOUNTS		
	Hitches with mtg. bolts & nuts, pins (P10)		
1	S10500F - Custom Hitch Plow & Wing Mount-Power Tilt (incl. yoke)		
1	S10996 - Access Step		
1	S11010 - 4" x 10" DA Cylinder (cannot be used with Husting Hitches)		
1	S11100 - Lift Yoke Extended Long (standard)		
1	S12700 - SAE "C" 2 bolt (constant running pump)		
1	S13010 - Push Center, 30-1/2"		
1	S14001 - LIFT GROUP - THREE GRAB		
1	S15002F - Hose Connecting Bracket w/stainless steel fittings and disconnects (no restrictor) (std.)		
1	S15101F - Quick Disconnects for Lift Cylinder, stainless steel		
1	HYDRAULICS FOR FACTORY MOUNTS		
1	S22030F - 40 Gallon (RH) Cabinet Mount (for H600 & H700 Series Rear Mast)		
1	S22111 - Hyd Oil Line Shut Off (each) 2" (must use with load sense systems)		
1	S22117F - Low Oil Sensor (for cabinet tank)		
1	S22120 - Return Line Manifold		
1	S24220F - Cab Control, Three Handle Floor Mount-air operated		
1	S2threeF - Cab Control, Three Handle Pedestal Mount-air operated		
1	S24280F - For units with Two Air Cab Controls		
1	S20001F - CUSTOMIZED HYDRAULIC PACKAGE (call for pricing)		
1	S26430SF - Hose Kit - Full Mount with SS tubing under truck		
1	SPREADER CONTROL SYSTEM		
1	S25017F - Controller Plumbed to Rear of Truck Chassis with stainless steel lines		
1	FRONT MAST FOR FACTORY MOUNTS		
1	S30700F - FH33 Hydraulic Assembly w/mtg. brk't (3 x 33 cyl.)		
1	S33300F - Full Trip Hinge (not to be used with trip edge wing)		
1	S34001F - Quick Disconnects for Front Wing Cylinder, stainless steel (1 per front mast)		
1	REAR MAST FOR FACTORY MOUNTS		



Cives Corporation, dba
 Viking Cives (USA)
 14331 Mill Street
 Harrisville, NY 13648
 Phone: (716) 622-7071
 Fax: (716) 568-8426
 www.vikingcives.com

QUOTATION

Quote ID: 322

Page 2 of 4

EMERGENCY
 PURCHASE

QUANTITY	DESCRIPTION	UNIT PRICE	AMOUNT
1	S40513F - HC109635 (RH) Rear Mast Assembly (includes poly cyl. and valve box covers)		
1	S40320F - 5/8" wire rope cable (for use with Hydraulic (FH - FAH) Front Mast)		
1	S40380 - Polymer Cylinder Box Cover - black only (for single rear mast)		
1	S40390 - Polymer Valve Box Cover - black only (for single rear mast)		
1	REVERSIBLE PLOW, HEAVY DUTY FULL TRIP 25 DEGREE		
1	S52030 - R1142FE Moldboard		
1	S52170 - Carbide Blade Option, 12" punching, with steel cover blade for 11' Moldboard and OW2852FE9		
1	S52330 - Twin Cylinder (cushion valve) Power Reverse Pushframe (PRR)		
1	S52370 - Trip Spring Arm for Straight Reversibles and OW2852FE (except 1248FE) (pair)		
1	S52410 - 30-1/2" pushlug swivel		
1	S52536 - Long Roller Lifting & Leveling Device (for PRRL only)		
1	S52600 - 25 Degree Moldboard Shoes (pair)		
1	S52610 - Curb Shoes (pair) (for straight moldboard only)		
1	S52650 - Screw Adjustable 12" dia. Mushroom Shoe Option Carbide Shoe (pair)		
1	S52710 - Rubber Deflector Option 12" wide - for 11' Moldboard		
1	S52785 - Plow Markers for reversible moldboards, flexible fluorescent orange, 28" high		
1	WING		
1	S60040 - 144WHD RH WING WELDMENT		
1	S60241 - Suburban/Rural Area Wing Modification (shorten top of moldboard) for 144 WHD		
1	S60720 - Carbide Blade Option, 12" punching, with steel cover blade for 144 Wing		
1	S61076F - Full Trip HD Hydraulic Arms (cushion spring lower)		
1	ACCESSORIES		
1	S70LEDF - Plow Lights LED HEATED (for use with reversible plows)		
1	S70121F - LED Lights Stop/Tail/Turn - back of body (pair)		
1	S70386F - LED Back Up Lights - back of body (pair)		
1	S70388F - LED Strobe Amber Flashing Lights - ABL back of body (pair) Two Pair in CabShield		
2	S89313F - Wing or Auxiliary Light LED ABL - Wing & Spinner		
1	S70135F - Pintle Hook (25 ton) and Plate		
1	S70307F - Electronic Brake Controller		
1	S70360F - 7 Way Trailer Plug		
1	S70146F - Poly Fenders for Single Axle Trucks (must specify tire size)		
1	S70149F - Hardwood Sideboards (set) - PAINT BLACK		
1	S8932F - BACK UP CAMERA		
1	VIKING WESTERN BODY		
1	ON1VIKI - VIKING 10 ft. Body, 36" sides, 34" door		



Cives Corporation, dba
 Viking Cives (USA)
 14331 Mill Street
 Harrisville, NY 13648
 Phone: (716) 622-7071
 Fax: (716) 568-8426
 www.vikingcives.com

QUOTATION

Quote ID: 322

Page 3 of 4

EMERGENCY
 PURCHASE

QUANTITY	DESCRIPTION	UNIT PRICE	AMOUNT
1	1/4 HARDOX Floor		
1	STAINLESS CONSTRUCTION		
1	STAINLESS LONGSILLS		
1	24" STAINLESS CABSHIELD		
1	MAILHOT HOIST WITH SAFETY PROP		
1	ROLL-RITE ELECTRIC TARP SYSTEM		
1	GS71105F - ROLL-RITE 6400 Aluminum Tarp System, external mount 4-spring pivot set, 92" tarp spool		
1	GS71116 - ROLL-RITE 8316 Heavy Duty Asphalt Tarp, 16 ft.		
1	FACTORY INTALLATION		
1	S79010F - Factory Install - Full Mount		
1	S79100F - Factory Install - Plow Lights		
1	S79110F - Factory Install - Wing Lights or Driving Lights or TT Light Stanchion		
1	S79115F - Factory Install - Sander Light or SpotLight		
1	S79117F - Factory Install - Revolving Light or Strobe Light		
1	S79150F - Factory Install - extra valve section (per each section)		
1	S79190F - Factory Install - Electric Spreader Control (piped to rear of truck frame)		
1	S79200F - Factory Install - Dump Body - Contractor Style & ELP		
1	S79221F - Factory Install - Liquid Spray System or Prewet		
1	S79310F - Factory Install - Tarp System, semi-automatic or electric		

Quote Total:	\$130,668.00
30.00% Discount:	(\$39,200.40)
Total Cost For Equipment:	\$91,467.60
Charges	
Total Due	\$91,467.60

The following options may be added:

QUANTITY	DESCRIPTION	PRICE EACH	AMOUNT

Customer must fill out the information below before the order can be processed...

Accepted by:	
Date:	
P.O. number:	



Cives Corporation, dba
Viking Cives (USA)
14331 Mill Street
Harrisville, NY 13648
Phone: (716) 622-7071
Fax: (716) 568-8426
www.vikingcives.com

QUOTATION

Quote ID: 322

Page 4 of 4

EMERGENCY
PURCHASE

The price and terms on this quotation are not subject to verbal changes or other agreements unless approved in writing by the Home Office of the Seller. All quotations and agreements are contingent upon strikes, accidents, fires, availability of material and all other causes beyond our control. Prices are based on costs and conditions existing on date of quotation and are subject to change by the Seller before final acceptance.

- ◆ Typographical and stenographic errors subject to corrections. Purchaser agrees to accept either overage or shortage not in excess of ten percent to be charged pro-rata. Purchaser assumes liability for patent and copyright infringement when goods are made to Purchaser's specifications. When quotation specifies material to be furnished by the purchaser, ample allowance must be made for reasonable spoilage and material must be of suitable quality to facilitate efficient production.
- ◆ Conditions not specifically stated herein shall be governed by the established trade customs. Terms inconsistent with those stated herein which may appear on Purchaser's formal order will not be binding on the Seller.
- ◆ Unless otherwise stated, Installation charges do not include modifications to exhaust systems, cab protectors or bumpers.